

Prevailing torque type hexagon lock nuts


low type, with polyamid insert

Tuercas hexagonales autofrenantes

forma baja con inserto de poliamida

非金属嵌件六角锁紧螺母

带尼龙嵌入，薄型



d ₁	e min.	h max.	m	s	d ₁	e min.	h max.	m	s
M3	6,01	4	2,4	5,5	M6	11,05	6	4	10
M4	7,66	5	2,9	7	M8	14,38	8	5,5	13
M5	8,79	5	3,2	8					

BN 1403			BN 521		
d ₁	■ / ●	☐	d ₁	■ / ●	☐
M3	●	100	M3	●	100
M4	●	100	M4	●	100
M5	●	100	M5	●	100
M6	●	100	M6	●	100
M8	●	100	M8	●	100


Hexagon cap nuts

low type

Tuercas hexagonales ciegas forma baja

六角盖形螺母

薄型

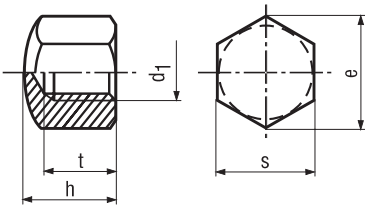

d ₁	e min.	h	s	min.	max.	d ₁	e min.	h	s	min.	max.
M4	7,66	5,5	7	4,16	4,64	M6	11,05	9	10	6,71	7,29
M5	8,79	7	8	4,96	5,44	M8	14,38	12	13	9,21	9,79

BN 1402			BN 517		
d ₁	■ / ●	☐	d ₁	■ / ●	☐
M4	●	100	M4	●	100
M5	●	100	M5	●	100
M6	●	100	M6	●	100
M8	●	100	M8	●	100

DIN 985

Brass
Latón

- plain / bruto
- nickel plated / niquelado

DIN 985: Standard withdrawn
Estándar descatálogo

DIN 917

Brass
Latón

- plain / bruto
- nickel plated / niquelado