

Hexagon head screws


fully threaded

Tornillos de cabeza hexagonal

totalmente roscados

六角头螺钉

全螺纹

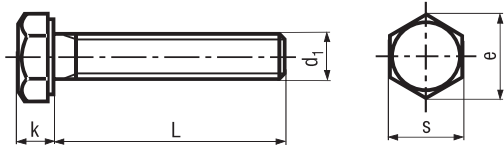

DIN 933

ISO 4017

Brass
Latón

- plain / bruto
- nickel plated / niquelado

DIN 933: Standard withdrawn
Estándar descatálogo

d ₁	M3	M4	M5	M6	M8	M10	M12	M16	M20
e	6,01	7,66	8,79	11,05	14,38	18,9	21,1	26,75	33,53
k	2	2,8	3,5	4	5,3	6,4	7,5	10	12,5
s	5,5	7	8	10	13	17/16*	19/18*	24	30

* Wrench size according to ISO on request
Entrecaras según ISO previa petición

BN 502											
d ₁	L	■ / ■	☐	d ₁	L	■ / ■	☐	d ₁	L	■ / ■	☐
M3	6	●	100	M6	10	●	100	M10	40	●	100
	8	●	100		12	●	100		45	●	100
	10	●	100		16	●	100		50	●	100
	12	●	100		20	●	100		60	●	50
	16	●	100		25	●	100		70	●	50
	20	●	100		30	●	100		80	●	50
M4	6	●	100	35	●	100	M12	100	100	●	50
	8	●	100	40	●	100		16	●	50	
	10	●	100	45	●	100		20	●	50	
	12	●	100	50	●	100		25	●	50	
	16	●	100	60	●	100		30	●	50	
	20	●	100	70	●	100		35	●	50	
	25	●	100	M8	10	●		100	40	●	50
	30	●	100		12	●		100	45	●	50
35	●	100	16		●	100	50	●	50		
40	●	100	20		●	100	60	●	50		
M5	6	●	100	25	●	100	70	●	50		
	8	●	100	30	●	100	80	●	50		
	10	●	100	35	●	100	M16	25	●	50	
	12	●	100	40	●	100		30	●	50	
	16	●	100	45	●	100		35	●	50	
	20	●	100	50	●	100		40	●	50	
	25	●	100	60	●	100		45	●	50	
	30	●	100	70	●	100		50	●	50	
	35	●	100	80	●	100	60	●	50		
	40	●	100	M10	16	●	100	70	●	50	
45	●	100	20		●	100	80	●	25		
50	●	100	25		●	100	M20	30	●	25	
60	●	100	30		●	100		40	●	25	
M6	8	●	100	35	●	100	50	●	25		

Hexagon head screws


fully threaded

Tornillos de cabeza hexagonal

totalmente roscados

六角头螺钉

全螺纹

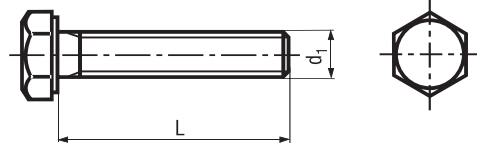

DIN 933

ISO 4017

Brass
Latón

- plain / bruto
- nickel plated / niquelado

DIN 933: Standard withdrawn
Estándar descatálogo

BN 503				■							
d ₁	L	■ / ●	☐	d ₁	L	■ / ●	☐	d ₁	L	■ / ●	☐
M3	5	●	100	M5	12	●	100	M8	12	●	100
	6	●	100		16	●	100		16	●	100
	8	●	100		20	●	100		20	●	100
	10	●	100		25	●	100		25	●	100
	12	●	100		30	●	100		30	●	100
	16	●	100	M6	10	●	100	M10	35	●	100
	20	●	100		12	●	100		20	●	100
	25	●	100		16	●	100		25	●	100
M4	8	●	100	20	●	100	30	●	100		
	10	●	100	25	●	100	35	●	100		
	12	●	100	30	●	100	40	●	100		
	16	●	100	35	●	100	45	●	100		
	20	●	100	40	●	100	50	●	100		
M5	8	●	100	50	●	100	60	●	50		
	10	●	100	60	●	100					

Hexagon head screws


fully threaded

Tornillos de cabeza hexagonal

totalmente roscados

六角头螺钉

全螺纹

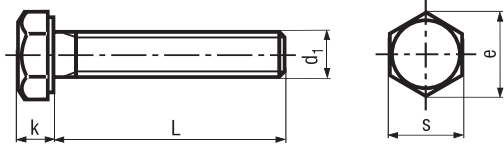

d ₁	M6	M8	M10
e	11,05	14,38	18,9
k	4	5,3	6,4
s	10	13	17/16*


* Wrench size according to ISO on request
Entrecaras según ISO previa petición

BN 598											
d ₁	L	▣ / ▢	☐	d ₁	L	▣ / ▢	☐	d ₁	L	▣ / ▢	☐
M6	16	●	100	M8	16	●	100	M10	20	●	100
	20	●	100		20	●	100		25	●	100
	25	●	100		25	●	100		30	●	100
	30	●	100		30	●	100		40	●	100
	40	●	100		40	●	100		50	●	100
	50	●	100		50	●	100				

Hexagon nuts ~0,8d

Tuercas hexagonales ~0,8d

六角螺母~0.8d



d ₁	e	m	s	d ₁	e	m	s	d ₁	e	m	s
M3	6,01	2,4	5,5	M6	11,05	5	10	M12	21,1	10	19/18*
M4	7,66	3,2	7	M8	14,38	6,5	13	M16	26,75	13	24
M5	8,79	4	8	M10	18,9	8	17/16*				

* Wrench size according to ISO on request
Entrecaras según ISO previa petición

BN 599					
d ₁	▣ / ▢	☐	d ₁	▣ / ▢	☐
M3	●	100	M8	●	100
M4	●	100	M10	●	100
M5	●	100	M12	●	100
M6	●	100	M16	●	100

DIN 933

ISO 4017

Aluminum
Aluminio

▣ plain / bruto

DIN 933: Standard withdrawn
Estándar descatálogo

DIN 934

~ISO 4032

Aluminum
Aluminio

▣ plain / bruto

DIN 934: Standard withdrawn
Estándar descatálogo