


Cross recessed flat countersunk head screws


Phillips H

Tornillos de cabeza avellanada


con hueco cruciforme Phillips forma H

十字槽沉头螺钉 (H型)

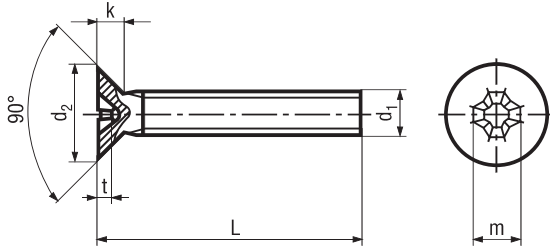

DIN 965 A	4.8
~ISO 7046	
	
Steel 4.8 Acero 4.8	
<ul style="list-style-type: none"> ■ zinc plated blue / cincado pasivado azul ■ zinc plated yellow / cincado pasivado amarillo 	

DIN 965: Standard withdrawn
Estándar descatálogo

d1	M2	M2,5	M3	(M3,5)	M4	M5	M6	M8
d2 max.	3,8	4,7	5,6	6,5	7,5	9,2	11	14,5
k max.	1,2	1,5	1,65	1,93	2,2	2,5	3	4
 Phillips	1	1	1	2	2	2	3	4
m ~	2,35	2,7	2,9	3,9	4,4	4,6	6,6	8,7
t	min. 0,95	1,25	1,5	1,4	1,9	2,1	2,8	3,9
	max. 1,25	1,55	1,8	1,9	2,4	2,6	3,3	4,4



All lengths fully threaded.
Countersink must be designed according to the corresponding standard!

Todas las longitudes de rosca ~ hasta cabeza.
Dimensionar el asiento de acuerdo con la norma correspondiente.



Screwdriver Bits 1/4": BN 31515 and BN 10639 / CG 1
Puntas de destornillador 1/4": BN 31515 y BN 10639 / GC 1

BN 388				■							
d1	L	■ / ■	■	d1	L	■ / ■	■	d1	L	■ / ■	■
M2	3	●	200	M3	6	●	200	(M3,5)	20	●	200
	4	●	200		8	●	200		25	●	200
	5	●	200		10	●	200		30	●	200
	6	●	200		12	●	200	M4	5	●	200
	8	●	200		(14)	●	200		6	●	200
	10	●	200		16	●	200		8	●	200
	12	●	200		(18)	●	200		10	●	200
	16	●	200		20	●	200		12	●	200
	20	●	200		(22)	●	200		(14)	●	200
	M2,5	3	●		200	25	●		200	16	●
4		●	200	30	●	200	(18)		●	200	
5		●	200	35	●	200	20		●	200	
6		●	200	40	●	100	(22)		●	200	
8		●	200	45	●	100	25	●	200		
10		●	200	50	●	100	30	●	200		
12		●	200	(M3,5)	5	●	200	35	●	200	
16		●	200		6	●	200	40	●	100	
20		●	200		8	●	200	45	●	100	
25		●	200		10	●	200	50	●	100	
M3	3	●	200		12	●	200	60	●	100	
	4	●	200		(14)	●	200	70	●	100	
	5	●	200		16	●	200	80	●	100	


Cross recessed flat countersunk head screws


Phillips H

Tornillos de cabeza avellanada

con hueco cruciforme Phillips forma H

十字槽沉头螺钉 (H 型)

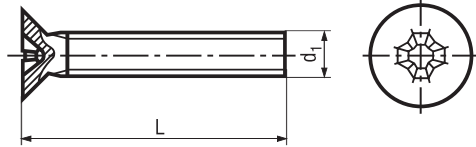

DIN 965 A	4.8
~ISO 7046	
Steel 4.8 Acero 4.8	
<ul style="list-style-type: none"> ■ zinc plated blue / cincado pasivado azul ■ zinc plated yellow / cincado pasivado amarillo 	

DIN 965: Standard withdrawn
Estándar descatálogo

BN 388											
d ₁	L	■ / ●	☐	d ₁	L	■ / ●	☐	d ₁	L	■ / ●	☐
M5	6	●	200	M5	70	●	100	M6	60	●	100
	8	●	200		80	●	100		70	●	100
	10	●	200	M6	8	●	200		80	●	100
	12	●	200		10	●	200	M8	12	●	100
	(14)	●	200		12	●	200		16	●	100
	16	●	200		(14)	●	200		20	●	100
	(18)	●	200		16	●	200		25	●	100
	20	●	200		(18)	●	200		30	●	100
	(22)	●	200		20	●	200		35	●	100
	25	●	200		(22)	●	100		40	●	100
	30	●	200		25	●	100		45	●	100
	35	●	100		30	●	100	50	●	100	
	40	●	100	35	●	100	60	●	100		
	45	●	100	40	●	100	70	●	100		
50	●	100	45	●	100	80	●	100			
60	●	100	50	●	100						

BN 8167							
d ₁	L	■ / ●	☐				
M3	6	●	200				
	8	●	200				
	10	●	200				


Cross recessed flat countersunk head screws


Pozidriv Z

Tornillos de cabeza avellanada

con hueco cruciforme Pozidriv forma Z

十字槽沉头螺钉 (Z 型)

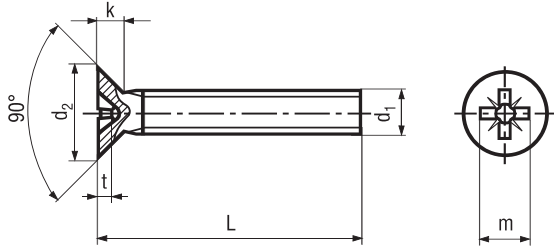

d ₁	M2	M2,5	M3	(M3,5)	M4	M5	M6
d ₂ max.	3,8	4,7	5,6	6,5	7,5	9,2	11
k max.	1,2	1,5	1,65	1,93	2,2	2,5	3
 Pozidriv	1	1	1	2	2	2	3
m ~	2,2	2,5	2,8	3,7	4	4,4	6,1
t	min. 0,92	1,22	1,48	1,34	1,6	2,05	2,46
	max. 1,17	1,47	1,73	1,8	2,06	2,51	2,92




All lengths fully threaded.

Countersink must be designed according to the corresponding standard!

Todas las longitudes de rosca ~ hasta cabeza.

Dimensionar el asiento de acuerdo con la norma correspondiente.

BN 3333												
d ₁	L	■ / ●	☐	d ₁	L	■ / ●	☐	d ₁	L	■ / ●	☐	
M2	4	●	200	M3	20	●	200	M4	60	●	100	
	5	●	200		25	●	200		M5	6	●	200
	6	●	200		30	●	200			8	●	200
	8	●	200		35	●	200			10	●	200
	10	●	200		40	●	100			12	●	200
	12	●	200		50	●	100			16	●	200
	16	●	200		(M3,5)	6	●			200	20	●
20	●	200	8	●		200	25	●		200		
M2,5	4	●	200	10		●	200	30	●	200		
	5	●	200	12		●	200	35	●	100		
	6	●	200	16		●	200	40	●	100		
	8	●	200	20		●	200	50	●	100		
	10	●	200	M4		6	●	200	M6	10	●	200
	12	●	200		8	●	200	12		●	200	
	16	●	200		10	●	200	16		●	200	
20	●	200	12		●	200	20	●		200		
M3	4	●	200		16	●	200	25		●	100	
	5	●	200		20	●	200	30		●	100	
	6	●	200		25	●	200	35		●	100	
	8	●	200	30	●	200	40	●	100			
	10	●	200	35	●	200	50	●	100			
	12	●	200	40	●	100						
	16	●	200	50	●	100						

DIN 965 A	4.8
~ISO 7046	
Steel 4.8 Acero 4.8	
■ zinc plated blue / cincado pasivado azul	

DIN 965: Standard withdrawn
Estándar descatálogo