


## Slotted oval countersunk head screws

### Tornillos con cabeza avellanada abombada

ranurada

开槽半沉头螺钉

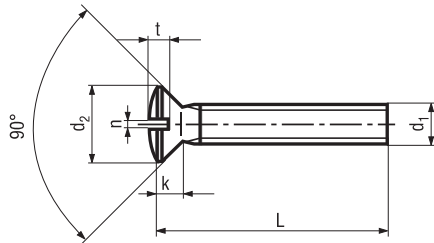

d <sub>1</sub>	M3	M4	M5	M6
d <sub>2</sub>	5,6	7,5	9,2	11
k	1,65	2,2	2,5	3
n	0,8	1	1,2	1,6
t	1,2	1,6	2	2,4



For thread lengths: see page 13.004  
Longitud de rosca: véase 13.004

BN 1067				■								
d <sub>1</sub>	L	■ / ●	☐	d <sub>1</sub>	L	■ / ●	☐	d <sub>1</sub>	L	■ / ●	☐	
M3	6	●	100	M4	12	●	100	M5	20	●	100	
	8	●	100		16	●	100		M6	25	●	100
	10	●	100		20	●	100			10	●	100
	12	●	100		25	●	100			16	●	100
	16	●	100		M5	12	●		100	20	●	100
M4	10	●	100	16		●	100	25	●	100		

~DIN 964 A	PA 6.6
~ISO 2010	
Polyamide 6.6 Poliamida 6.6	
■ white / blanco	

DIN 964: Standard withdrawn  
Estándar descatalogado